

19929



Farmers Electric Cooperative

2000 I-30 E
Greenville, TX 75402

Thursday, January 22, 2026

County: Hunt County

Farmers Electric Cooperative Member: RAY LOW
Service Order Number: 2025092332

FILED FOR RECORD	
at 1:30	o'clock P M
FEB 10 2026	
BECKY LANDRUM County Clerk, Hunt County, Tex.	
by 	

Greetings:

Farmers Electric Cooperative, Inc. is requesting permission to construct electrical power distribution facilities which will cross County Road 3326 FROM NEW POLE WHICH WILL REPLACE POLE 032199 (2385 ' S OF COUNTY ROAD 3327). WE WILL BE BORING UNDER THE ROAD.

Site location map/construction sketches are attached. The construction sketch details the proposed work. The proposed electrical service will be constructed:

- Overhead - All road crossings will have a minimum vertical clearance of 22 feet.
- Underground - All underground bore crossings are PVC encased 4' of coverage from the lowest point of the Right of Way.

If you have any questions, please contact me at any time.


Sincerely,

Psalm Harper
pharper@farmerselectric.coop
Engineering Coordinator

Enclosures

County Approval Section:

Approved: Denied:

Authorized Signature: 

Date: 01/30/2026




OH 01

PJN: JS 2025092332 LOW

911 Address: 4110 COUNTY ROAD 3326

Completed By:

Locates: DIGTESS, CASH SUD.

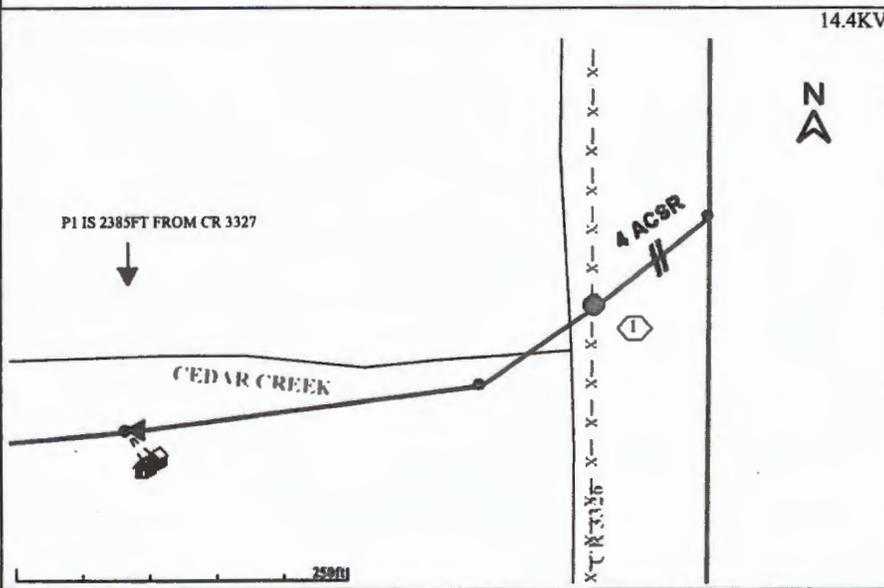

Source: none
 Phase: B PHASE
 Span: 0
 Comments: POLE
 032199

Existing (0) 4 ACSR (C)
 New (1) 40-4 (H)
 New (1) POLESET (C)
 New (1) VA1-1 (H)
 New (1) VM2-11 (H)
 Retire (1) 40-4 (H)
 Comment: 40-5 1982
 OSM 2012
 Retire (1) VA1-1 (H)
 Retire (1) VM2-12 (H)

Misc. Remarks: Change out Pole 032199 d/a age and condition. Work before .12 to use the new pole for a primary riser. Grid: 9822480770090. NO COST - FEC MAINT. JS



UG MB Not Ready 01

14.4KV

<p>1</p> <p>Source: none Phase: B PHASE Span: 0 Comments: NEW POLE FROM .25</p> <p>Existing (1) 40-4 Existing (0) 4 ACSR Existing (1) VA1-1 Existing (1) VM2-11 New (3) S BAR New (1) SC30 New (1) VUA1</p>	<p>2</p> <p>Source: 1 Phase: B PHASE Span: 316 Comments:</p> <p>New (2) 2" 45 ELBOW New (2) 2" 90 ELBOW New (40) BORE 2" RP DIRT New (2) BORE PIT New (316) U1/0 PRIM New (70) U1/0 PRIM T New (3) UJ2-6 New (1) UM1-SNC-S New (1) UM48-1 New (276) UM50-P-2 20 New (10) UM50-P-2 T New (1) UMS-1 New (276) UR2 6" X 48" DIRT New (1) YUG7-25 New (1) YUM6-34</p>	<p>3</p> <p>Source: 2 Phase: B PHASE Span: 10 Comments: PDMT XFMR</p> <p>New (1) 2S 200A 120/240 UG W 320A MB New (2) 3" 90 ELBOW 24R New (1) 3" UMS New (10) U350 TPX SERV New (15) U350 TPX T New (10) UM50-P-3 New (10) UM50-P-3 T New (10) UR2 6" X 36" DIRT</p>
--	--	---

Locates: DIGTESS, CASH WATER.

Misc. Remarks: Work with .25. At new pole from .25 build a new primary riser and bore 40ft under CR 3326. After the bore, trench approx 276ft of underground primary to a new padmount xfmr at P2. From the pdmt xfmr run new perm ug service to a 320a ug meter rack at P3 to service a new manufactured home. MB NOT READY / MB PROVIDED. Rqrs (3) easements - PIDs: 24220, 24229, 98611, constr ris, cr crossing permit and additional tree clearing. XFMR/MTR GRID: 9822480770090. R1/R1. ATC DUE ON .12. JS